

## 12V BLDC Motor Controller with 32bit Arm® Cortex® M4

Product Preview - Jul 6, 2021



E533.06

#### **Features**

- Driving DC, BLDC, PMSM motors from ~20W to ~1000W
- Programmable current source gate drivers up to 400mA gate current to drive B6-NMOS bridge
- Powerful 32 Bit Arm® Cortex®-M4¹) core
- 128kB Hybrid program memory
  - 96kB ECC protected Flash
  - 32kB System ROM incl. LIN protocol and bootloader
- 8kB SRAM with ECC protection, 256 Byte EEPROM
- Current measurement by single external shunt, integrated amplifier with digital gain and offset setting and fast 12bit ADC
- Four channel PWM generator (left-/center-/right-aligned)
- High side charge pump supply for 100% duty ratio PWM
- LIN/PWM interface integrated on chip
- LIN 2.x compliant to ISO17987 and SAE-J2602-2
- User-configurable GPIOs including SPI and analog input
- Wide operating voltage range 7V 28V
- Extended voltage range with ext. charge pump 3V..28V
- Optional oscillator input for external crystal
- AEC-Q-100 qualified
- Support for functional safety applications up to ASIL B according to ISO26262

#### **Applications**

- Electric cooling fans, HVAC fans,
- Fuel, hydraulic, oil and water pumps

### General Description

The E533.06 is a powerful 3 phase BLDC motor controller for 12V automotive application. The device combines a 32bit Arm® Cortex®-M4 microcontroller, large program memory, advanced coprocessors and gate driver circuits in a small footprint package.

The embedded PWM- and ADC-accelerator units offer enhanced performance for sensor-less, single shunt motor control. This enables advanced control algorithms like FOC with all calculations and measurements executed in each PWM cycle (less than  $25\mu s$ ), leaving 50% free CPU load for the applications.

The large program memory offers enough space for motor control algorithms, communications and diagnostics while keeping the flexibility for additional functions or the required free memory at project start.


The E533.06 is developed according to ISO26262, based on safety requirements rated up to ASIL B.

Due to the optimized feature set and high system performance the E533.06 is the perfect solution to fulfil the demand for drive dynamics in pumps or silent operation for fans and blowers.

## Ordering Information

Ordering-No.	Temp Range [ T <sub>j</sub> ]	Package
E53306A78B	-40°C to +150°C	QFN48L7
E53306A99H	-40°C to +150°C	LQFP48L7EP

1) ARM  $^\circ$  and Cortex  $^\circ$  are the registered trademarks of ARM Limited in the EU and other countries.

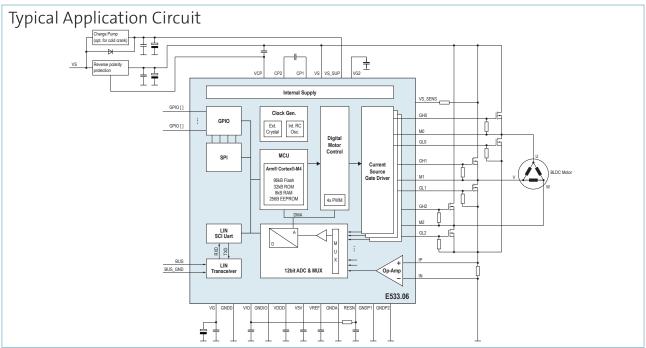

This document contains information on a product under development. Elmos Semiconductor SE reserves the right to change or discontinue this product without notice.

# Elmos Support

Headquarters Elmos Semiconductor SE Heinrich-Hertz-Str. 1 44227 Dortmund (Germany) Phone: +49 (0) 231 / 75 49-100

Fax: +49 (0) 231 / 75 49-149 sales-germany@elmos.com

www.elmos.com

Sales and Application Support Office North America Elmos NA. Inc. sales-usa@elmos.com

Sales and Application Support Office China Elmos Semiconductor Technology (Shanghai) Co., Ltd. sales-china@elmos.com

Sales and Application Support Office Korea Elmos Korea sales-korea@elmos.com

Sales and Application Support Office Japan Elmos Japan K.K. sales-japan@elmos.com

Sales and Application Support Office Singapore Elmos Semiconductor Singapore Pte Ltd. sales-singapore@elmos.com