

4-Channel Squib Driver with Current Counter

Production Data - Dec 11, 2015

E981.20



Features

- Input operation range 8V to 35V
- Three squib current modes (LCM, HCM1 and HCM2) selectable via SPI commands
- Simultaneously firing of 4 loops possible
- Short circuit detection and monitoring during deployment
- Squib channel diagnostics, monitoring and current counter
- Autarky voltage and squib supply voltage diagnostics
- Separate low side and high side driver control
- Serial interface (SPI synchronous communication) to μC (3.3V and 5V tolerant inputs)
- Minimum external components necessary

Applications

 Squib driver in a Restraint Diagnostic and control Module (RDM)


Ordering Information

Ordering-No.:	Temp _{Amb} Range	Package
E98120A39B	-20°C to +95°C	QFN44L7

General Description

The Four Channel Squib Driver ASSP E981.20 is designed specifically for automotive airbag applications. The squib driver provides individual control and diagnostics for 4 floating squibs. It has two sources of control, an arming sensor signal and a μC signal via the SPI bus. An active signal at the arming sensor input will activate all selected drivers, which have been enabled by the μC . During firing the squibs, the input voltage of the high side switch is limited to 25V for LCM and HCM2 Mode and to 35V in HCM1 Mode by the system. In order to limit the power dissipation of the driver stages, internal firing limitation counters (FTL) are implemented for each high side driver. Additionally an over voltage detection for all 4 LSD (VTxL) output voltages is provided to avoid a damage of the drivers in case of a short to battery during firing and during driver test in application.

Typical Application Circuit

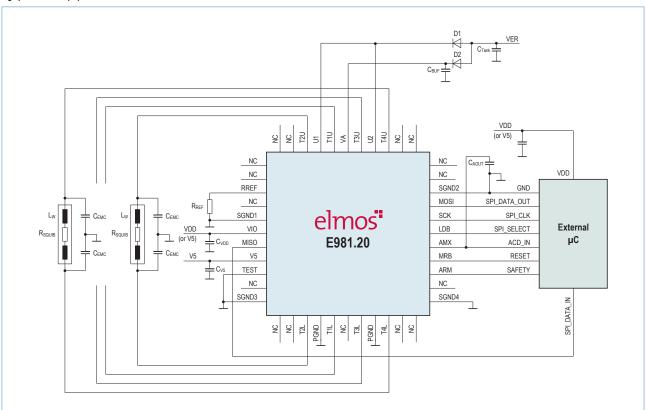

 $Elmos\, Semiconductor\, AG\, reserves\, the\, right\, to\, change\, the\, detail\, specifications\, as\, may\, be\, required\, to\, permit\, improvements\, in\, the\, design\, of\, its\, products.$

Elmos Support

Headquarters

Elmos Semiconductor AG

Heinrich-Hertz-Str. 1

44227 Dortmund (Germany)

Phone: +49 (0) 231 / 75 49-100 Fax: +49 (0) 231 / 75 49-149

sales-germany@elmos.com

www.elmos.com

Sales and Application Support Office North America

Elmos NA. Inc.

32255 Northwestern Highway, Suite 220 Farmington Hills, MI 48334 (United States)

Phone: +1 (0) 248 / 8 65 32 00 sales-usa@elmosna.com

Sales and Application Support Office China

Elmos Semiconductor Technology (Shanghai) Co., Ltd. Unit 16B, 16F Zhao Feng World Trade Building,

No. 369 Jiang Su Road, Chang Ning District,

Shanghai, PR China, 200050

Phone: +86 (0) 21 / 6210 0908 +86 (0) 21 / 6219 7502 sales-china@elmos.com

中国地区销售与应用支持

艾尔默斯半导体技术(上海)有限公司 中国 上海市 长宁区 江苏路369号 兆丰世贸大厦16楼 16B单元, 200050

电话: +86 (0) 21 / 6210 0908 传真: +86 (0) 21 / 6219 7502 sales-china@elmos.com

Sales and Application Support Office

Korea

Elmos Korea

B-1007, U-Space 2, #670 Daewangpangyo-ro, Sampyoung-dong, Bunddang-gu, Sungnam-si

Kyounggi-do 463-400 Korea Phone: +82 (0)31 / 7 14 11 31 sales-korea@elmos.com

Sales and Application Support Office

Japan

Elmos Japan K.K. BR Shibaura N Bldg. 7F

3-20-9 Shibaura, Minato-ku,

Tokyo 108-0023 Japan

Phone: +81 3 / 3451-7101

Fax: +81 3 / 3451-7104 sales-japan@elmos.com

Sales and Application Support Office Singapore

Elmos Semiconductor Singapore Pte Ltd.

3A International Business Park

#09-13 ICON@IBP

609935 Singapore

Phone: +65 (0) 6908 1261 Fax: +65 (0) 6570 5906

sales-singapore@elmos.com