

Features

- Bi-directional interface in 2-wire & 3-wire variants
- Programmable transducer frequencies 30kHz - 83kHz
- Programmable driver power and receiver gain
- Excellent short & long range performance due to:
 - Wide signal gain range
 - Sensitivity time control
 - Automatic threshold generation
 - Near-field threshold generation
 - Fast time constant algorithm
 - Echo peak detection
- Flexible IO protocol
- Transducer diagnosis information
- Integrated temperature sensor
- Envelope readout via IO or testmode
- Embedded EEPROM for calibration data
- Readable Chip ID for traceability



Applications

- Ultrasonic park assist systems (USPA, PAS, ...)
- Industrial distance measuring

Ordering Information

Product ID	Order Code	Interface	Package
E524.08	E52408A52C	2-wire	QFN20L4
E524.09	E52409A52C	3-wire	QFN20L4

Typical Operating Circuit

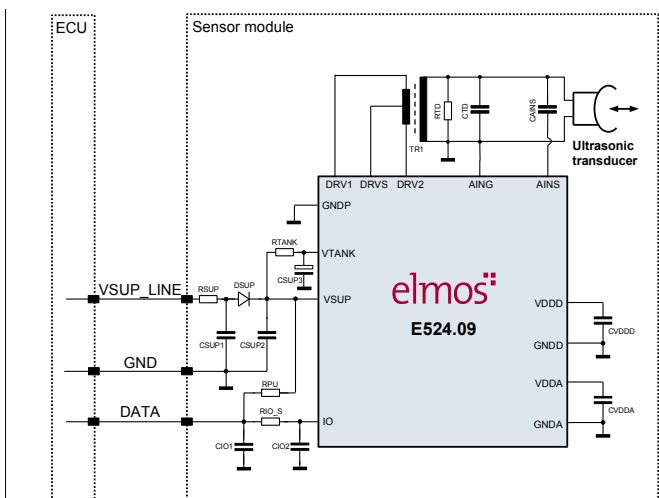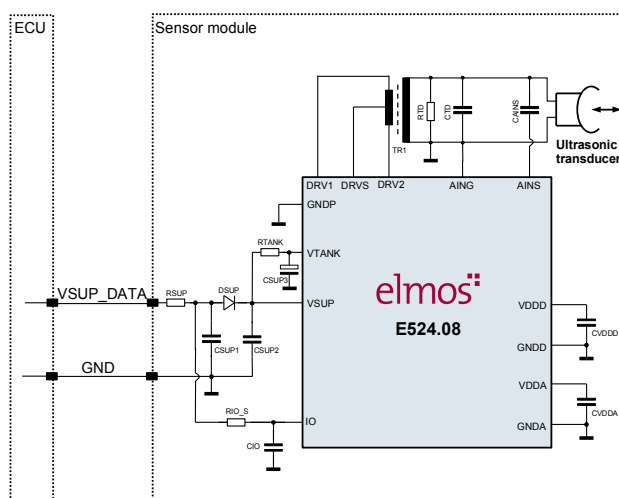

General Description

The device builds the core for a robust and easy-to-handle distance measurement system, while offering flexibility for customer applications.

A driver unit stimulates the ultrasonic transducer via a center tapped transformer. Driver frequency, transmitted burst power and other parameters are user configurable.

The received echo signal is amplified, converted and digitally processed. Customized obstacle interpretation is feasible by a variable detection threshold. A flexible IO protocol combined with STC (Sensitivity time control), ATG (Automatic threshold generation), NFTG (Near-field threshold generation), FTC algorithm (Fast time constant) and EPD (Echo peak detection) optimize short and long range performance.

Application relevant settings can be stored in EEPROM during an End-Of-Line calibration by the customer. For evaluation and debugging purposes, envelope and threshold data can be read out via test mode and additionally the envelope data can be read out via IO line as an analog curve.

Communication with the control unit is possible via 2-wire or 3-wire configuration. The E524.08 supports a bi-directional communication via data modulation on the supply line. The E524.09 supports a dedicated IO-line for data transfer.

13 Contact Info

Headquarters Elmos Semiconductor AG Heinrich-Hertz-Str. 1, D-44227 Dortmund (Germany) www.elmos.com	Phone: +49 (0) 231 / 75 49-100 Fax: +49 (0) 231 / 75 49-149 sales-germany@elmos.com
Sales and Application Support Office North America Elmos NA. Inc. 32255 Northwestern Highway, Suite 220 Farmington Hills, MI 48334 (USA)	Phone: +1 (0) 248 / 8 65 32 00 Fax: +1 (0) 248 / 8 65 32 03 sales-usa@elmos.com
Sales and Application Support Office Korea Elmos Korea B-1006, U-Space 2, #670 Daewangpangyo-ro, Sampyoung-dong, Bunddang-gu, Sungnam-si Kyounggi-do 463-400 Republic of Korea	Phone: +82 (0) 31 / 7 14 11 31 Fax: +82 (0) 31 / 6 28 10 90 sales-korea@elmos.com
Sales and Application Support Office Japan Elmos Japan K.K. BR Shibaura N Bldg. 7F 3-20-9 Shibaura, Minato-ku, Tokyo 108-0023 Japan	Phone: +81 3 / 3451-7101 Fax: +81 3 / 3451-7104 sales-japan@elmos.com
Sales and Application Support Office China Elmos Semiconductor Technology (Shanghai) Co., Ltd. Unit 16B, 16F Zhao Feng World Trade Building, No. 369 Jiang Su Road, Chang Ning District, Shanghai, PR China, 200050	Phone: +86 (0) 21 / 6210 0908 Fax: +86 (0) 21 / 6219 7502 sales-china@elmos.com
Sales and Application Support Office Singapore Elmos Semiconductor Singapore Pte Ltd. 3A International Business Park, #09-13 ICON@IBP, Singapore 609935	Phone: +65 (0) 690 / 8 12 61 Fax: +65 (0) 6570 / 5906 sales-singapore@elmos.com