


Features

- ▶ Minimum Component Ultrasonic Park Assist Solution
- ▶ Single Transceiver Architecture
- ▶ Programmable to transducer frequencies 40kHz to 58kHz
- ▶ Supports "Receive Only" Mode
- ▶ High Sensitivity and Low Noise Down to 0.5μVRMS
- ▶ Driver Power and Signal Gain Programmable
- ▶ Digital Filtering and Signal Processing
- ▶ 14 Programmable Threshold / Time Settings for Echo Envelope Evaluation
- ▶ One Wire I/O to Program and Receive Echo Signal
- ▶ Embedded EEPROM to Store Settings
- ▶ Automotive Supply and I/O Protection
- ▶ AEC-Q100 Qualification

Applications

- ▶ Ultrasonic Park Assist (USPA)
- ▶ Industrial Distance Measuring
- ▶ Robotics

Typical Applications Circuit

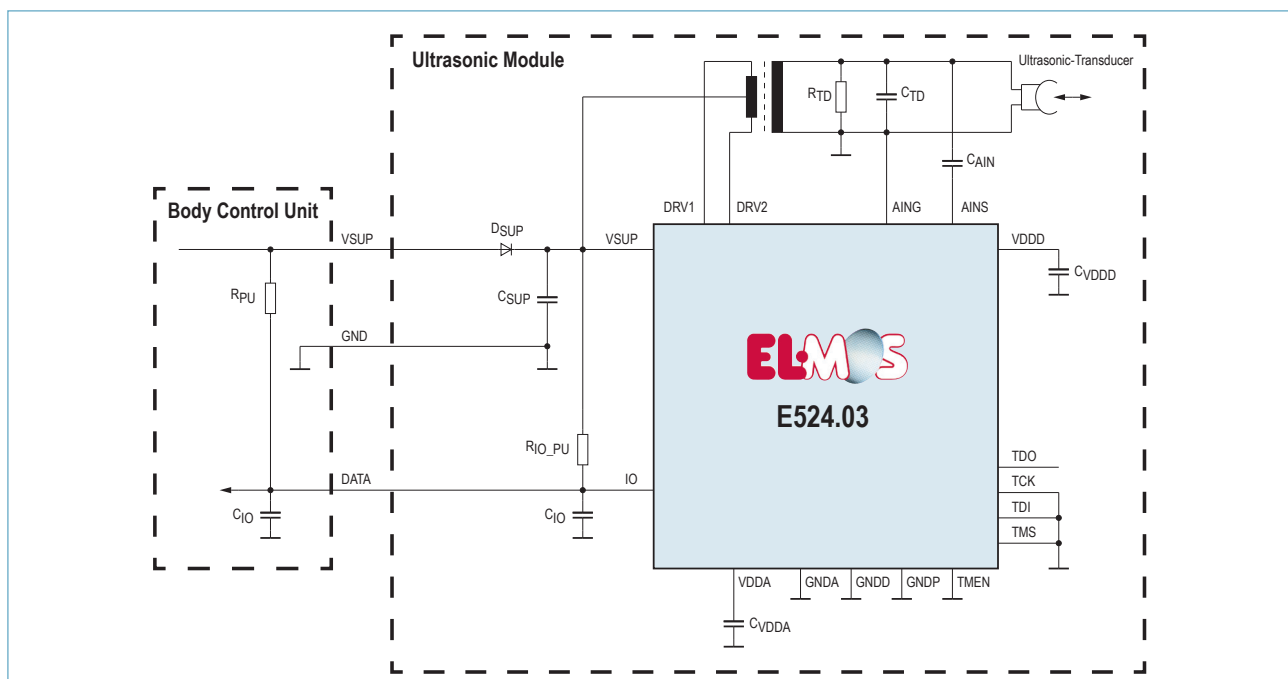

General Description

The E524.03 offers ultrasonic range detection with minimum component count.

In transmit mode, the IC drives a center tapped transformer directly. Driver frequency, transmitted burst power and other parameters are user configurable and stored in embedded EEPROM via a single wire IO pin at assembly. The device features settings for short and long distance measurement.

In receive mode, the echo signal is first amplified with a programmable gain amplifier and converted by an internal analog-to-digital converter. The signal is subsequently digitally filtered and compared. Comparator thresholds are adjustable via registers for defined interval lengths within a measurement period. The resulting signal is available at pin IO for the hosting BCU. A "Receive Only" mode enables the reception of indirect echos. The E524.03 interfaces with the BCU via one dedicated line.

Ordering Information

Product ID	Temp. Range	Package
E524.03	-40°C to +85°C	QFN20L4

ELMOS Support

Headquarters

ELMOS Semiconductor AG

Heinrich-Hertz-Str. 1
44227 Dortmund (Germany)
Phone: +49 (0) 231 / 75 49-100
Fax: +49 (0) 231 / 75 49-149
sales@elmos.com
www.elmos.com

Regional Sales and Application Support Office Munich

ELMOS Semiconductor AG

Am Gefluegelhof 12
85716 Unterschleißheim/Eching (Germany)
Phone: +49 (0) 89 / 31 83 70-0
Fax: +49 (0) 89 / 31 83 70-31
sales-elmuc@elmos.com

Sales and Application Support Office North America

ELMOS NA. Inc.

32255 Northwestern Highway, Suite 45
Farmington Hills, MI 48334 (United States)
Phone: +1 (0) 248 / 8 65 32 00
elna-sales@elmosna.com

Sales and Application Support Office Korea and Japan

ELMOS Korea

Suite 1907
Park View Office Tower
6 Jeongja-dong, Bundang-gu, Seongnam-si, Kyonggi-do,
463-863 Republic of Korea
Phone: +82 (0)31 / 7 14 11 31
jin-koo.lee@elmos.com

Sales and Application Support Office China

ELMOS Semiconductor Technology (Shanghai) Co., Ltd.

Unit London, 1BF GC Tower,
No. 1088 YuanShen Road,
Pudong New District,
Shanghai, PR China, 200122
Phone: +86 (0) 21 / 5178 5178
sales_china@elmos.com

中国地区销售与应用支持

艾尔默斯半导体技术（上海）有限公司
中国上海浦东新区源深路1088号
葛洲坝大厦1B楼伦敦单元, 200122
电话: +86 (0) 21 / 5178 5178
sales_china@elmos.com

Sales and Application Support Office Singapore

ELMOS Semiconductor Singapore Pte Ltd.

60 Alexandra Terrace
#09-31 The Comtech (Singapore 118502)
Phone: +65 (0) 663 / 5 11 41
Fax: +65 (0) 663 / 5 11 40
sales@elmos.com

Note ELMOS Semiconductor AG (below ELMOS) reserves the right to make changes to the product contained in this publication without notice. ELMOS assumes no responsibility for the use of any circuits described herein, conveys no licence under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies. ELMOS does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.

Copyright © 2012 ELMOS Reproduction, in part or whole, without the prior written consent of ELMOS, is prohibited.